


>> **S 16. Vinkelrätt fästelement, enkelt**  
 >> **S 17. Vinkelrätt fästelement, dubbelt**

Dimensioner på vinkelräta fästen

Ø	6.5-1/4"	8-5/16"	10-3/8"	12.5-1/2"	16-5/8"	20-3/4"
A	10	11	13	15	18	22
B	6	7	9	10	13	15
C	8.7	10	13	15.8	18	23
D	3.2	3.2	4.2	5.3	5.4	6.2
H	6	7	9	11	13.5	16.6
L	5.7	6	6.6	6.8	10.3	12
S	1	1	1	1	1.5	2

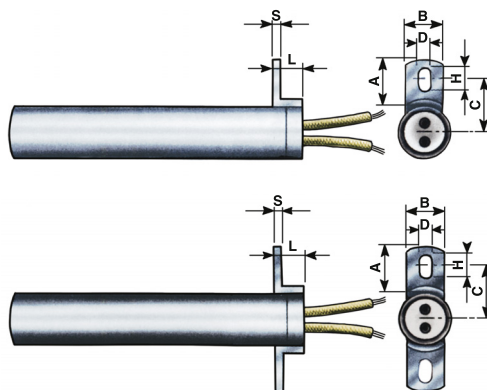

>> **S 18, S 19, S 20. Element med elektrisk anslutning i båda ändar**

Element med elektrisk anslutning i båda ändar

S 18. Med släta nickelpinnar



S 19. Med gängade anslutningspinnar och muttrar



S 20. Med flexibla kablar





>> **S 21, S 22. Svetsad nippel / gänga mot elementände / gänga mot kopplingsände**

Elementen kan försees med en nippel i rostfritt stål enligt tabell nedan eller enligt särskild specifikation. Används speciellt vid vätskeuppvärmning.

Standardnippel i rostfritt stål:

Elementdiameter

mm	6.5	8	10	12.5	16	20	tum	1/4"	3/8"	1/2"	5/8"	3/4"
A	11	13	15	17	20	25		11	15	17	20	25
B	4	4.5	5	5.5	6	7		4	5	5.5	6	7
C	12	14	17	19	24	30		12	17	19	24	30
Gänga	10x1	12x1.5	14x1.5	16x1.5	20x1.5	27x1.5		1/8"	1/4"	3/8"	1/2"	3/4"

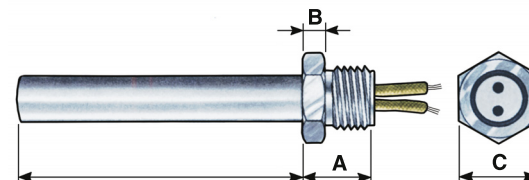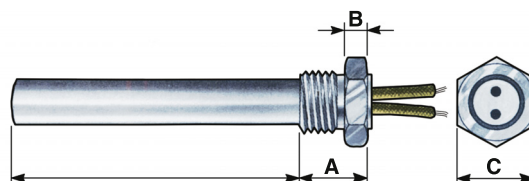

>> **S 23. Dubbelgängad nippel**

Standardnippel i rostfritt stål:

Elementdiameter

mm	6.5	8	10	12.5	16	20	tum	1/4"	3/8"	1/2"	5/8"	3/4"
A1	7	8.5	10	11.5	14	18		7	10	11.5	14	18
B	4	4.5	5	5.5	6	7		4	5	5.5	6	7

